

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 04 SEP 2003

WIPO

INT

10 / 525978  
PCT/ SE 03 / 01318

28 FEB 2005

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Sandvik AB, Sandviken SE  
Applicant (s)

(21) Patentansökningsnummer 0202533-6  
Patent application number

(86) Ingivningsdatum 2002-08-28  
Date of filing

Stockholm, 2003-08-28

För Patent- och registreringsverket  
For the Patent- and Registration Office



Lisa Junegren

Avgift  
Fee

BEST AVAILABLE COPY

### PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

AWAPATENT AB

Kontor/Handläggare  
Växjö/Erik Simonsson/ESN

SANDVIK AB

Ansökningsnr

Vår referens  
SE-2023094

1

A WEAR PART FOR A CRUSHER

Technical Field of the Invention

The present invention relates to a distributor plate adapted to be releasably mounted on a horizontal lower disc of a rotor of a vertical shaft impact crusher, said rotor having an opening for the intake of material to be crushed and at least one outflow opening for material leaving the rotor.

10 Background Art

Vertical shaft impact crushers (VSI-crushers) are used in many applications for crushing hard material like rocks, ore etc. US 3,154,259 describes a VSI-crusher comprising a housing and a horizontal rotor located inside the housing. Material that is to be crushed is fed into the rotor via an opening in the top thereof. With the aid of centrifugal force the rotating rotor ejects the material against the wall of the housing. On impact with the wall the material is crushed to a desired size. The housing wall could be provided with anvils or have a bed of retained material against which the accelerated material is crushed.

The rotor of a VSI-crusher usually has a horizontal upper disc and a horizontal lower disc. The upper and lower discs are connected with a vertical rotor wall. The upper disc has an aperture for feeding material into the rotor. The material lands on the lower disc and is then thrown out of the rotor via openings in the rotor wall.

The material exerts an impact force and wear on the lower disc. To ensure a long life of the lower disc it is usually provided with a distributor plate. The distributor plate, which is located at the centre of the

lower disc, is made from a material that is resistant to impact and wear.

In US 3,767,127 to Wood a deflection disc assembly is described. The deflection disc has an outer ring and a  
5 core member. A central stud passing through the core member and threadedly engaged to the rotor shaft holds the deflection disc in position in the rotor.

US 4,690,341 to Hise describes a flat centre wear plate which is fixed to the rotor shaft by a bolt.

10 WO 01/30501 describes a distributor comprising a first part having an inclined surface and a second part with a flat surface. A bolt holds the first and second parts fixed to a rotor shaft.

The distributor plates described above do not have a  
15 very long life and cause a rather long down time when they need to be replaced. To make it possible for a person working with the rotor to replace the distributor plate it is often necessary to dismantle the top of the rotor.

20

#### Summary of the Invention

It is an object of the present invention to provide a distributor plate which has a longer life and which  
25 decreases the down time required for maintenance of the rotor.

This object is achieved with a distributor plate according to the preamble and characterised in that the distributor plate has at least one straight side edge as  
seen from above.

30 An advantage with this distributor plate is that its life is greatly increased. The straight side edge decreases the wear, particularly at the periphery of the distributor plate. A possible explanation is that much of the wear at the periphery of the distributor plate may be  
35 caused by dust loaded air streams circulating inside the rotor. Those air streams may be hindered by the straight side edge thus reducing the wear.

Preferably the distributor plate is a polygon. A polygon has several straight side edges and would thus be able to efficiently hinder any dust loaded air streams. Still more preferably said polygon is an equilateral polygon, the number of sides of the polygon being chosen such that the number of sides is 1, 2 or 3 times the number of outflow openings of the rotor to which the distributor plate is to be mounted. An equilateral polygon makes it easier to balance the rotor. The distributor plate should have at least one side edge corresponding to each outflow opening of the rotor. If the number of sides of the distributor plate is 2 or 3 times the number of outflow openings it is possible to turn the distributor plate after some time in operation such that the sides being adjacent to the outflow openings is changed. Thus the life of the distributor plate is prolonged. Preferably the number of sides is 2 times the number of outflow openings of the rotor. This design has proven to give both a long life, possibly due to the fact that such a number of sides are especially efficient in hindering the rotating air streams inside the rotor, and the possibility to turn the distributor plate after some time of operation to further increase its life.

Preferably at least one straight side edge of the distributor plate is adapted to be parallel to an outflow direction of material leaving the rotor. This design has proven to give a long life. It is also easy to make the distributor plate fit with a horizontal wear plate extending from a position close to the centre of the rotor and towards the outflow opening.

According to a preferred embodiment the distributor plate at the centre of its lower face has a recess adapted to make the distributor plate horizontally turnable around a vertical shaft mounted on the lower disc, such that the position of the distributor plate in relation to the lower disc may be adjusted before

mounting the distributor plate. The recess makes it easy to centre the distributor plate on the rotor. After centring the distributor plate it may be turned around the shaft until the correct position of the edge/-s is obtained, the distributor plate still being safely centred. It also becomes easy to turn the distributor plate to some degree after it has become worn. This makes it possible to quickly turn the distributor plate to a new position without having to dismount the rotor. Thus maintenance stops become quick and efficient. Still more preferably the recess extends only through a part of the thickness of the distributor plate, the upper face of the distributor plate thus being unaffected by said recess. An advantage with this design is that the upper surface of the distributor plate obtains a much better impact and wear resistance since it is unbroken. The central part of the distributor plate is exposed both to heavy impact wear and possibly also to wear caused by dust loaded air streams circulating inside the rotor. The risk of rocks breaking a central bolt and the risk of an excessive wear of a central bolt or of a cap protecting a central bolt is thus avoided with the design of the present invention. Also it becomes easier to manufacture the distributor plate with the unbroken upper surface, in particular if the upper surface is to be provided with a layer of extra resistant material.

Preferably the upper face of the distributor plate comprises an unbroken layer of a hard metal, such as tungsten carbide. Such a layer of hard metal will substantially prolong the life of the distributor plate and thus decrease maintenance costs.

According to a preferred embodiment the distributor plate comprises mounting means located at a vertical side edge of the distributor plate and adapted for the mounting of a vertical support fixing the distributor plate to the lower disc of the rotor. An advantage with such mounting means is that they do not interact with the

upper surface of the distributor plate. Another advantage is that the distributor plate will provide some protection for the mounting means located below the actual material flow. The mounting means may also be fitted and removed without having to lift the entire distributor plate.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereafter.

#### Brief Description of the Drawings

The invention will hereafter be described in more detail and with reference to the appended drawings.

Fig 1 is three-dimensional section view and shows a rotor for a VSI-crusher

Fig 2 is a three-dimensional view and shows the rotor of fig 1 with the upper disc removed.

Fig 3 shows the view of fig 2 as seen from above in a two dimensional perspective.

Fig 4 is an enlargement of the central portion of fig 3 and shows a distributor plate.

Fig 5 is a sectional view along the line V-V of fig 4.

Fig 6 is a three-dimensional view of the distributor plate.

Fig 7 is a three-dimensional view as seen along the arrow VII of fig 4.

Fig 8 is a three-dimensional view of a distributor plate according to a second embodiment of the invention.

Fig 9 is a three-dimensional view and shows an alternative way of releasably fixing the distributor plate.

Fig 10 is an enlargement of the area X shown in fig 9.

Fig 11 shows the distributor plate before being secured to the mounting plate.

Fig 12 shows a locking member for securing the distributor plate to the mounting plate.

Fig 13 is a three-dimensional view of a distributor plate according to a third embodiment of the invention.

5

# Detailed Description of Preferred Embodiments of the Invention

Fig 1 shows a rotor 1 for use in a VSI-crusher. The rotor 1 has a roof in the form of an upper disc 2 having a top wear plate 3 and a floor in the form of a lower disc 4. The lower disc 4 has a hub 6, which is welded to the disc 4. The hub 6 is to be connected to a shaft (not shown) for rotating the rotor 1 inside the housing of a VSI-crusher.

15 The upper disc 2 has a central opening 8 through which material to be crushed can be fed into the rotor 1. The upper disc 2 is protected from wear by upper wear plates 10 and 12. The upper disc 2 is protected from rocks impacting the rotor 1 from above by the top wear plate 3. As is better shown in fig 2 the lower disc 4 is protected from wear by three lower wear plates 14, 16 and 18.

25 The upper and lower discs 2, 4 are separated by and held together by a vertical rotor wall which is separated into three wall segments 20, 22 and 24. The gaps between the wall segments 20, 22, 24 define outflow openings 26, 28, 30 through which material may be ejected against a housing wall.

30 At each outflow opening 26, 28, 30 the respective wall segment 20, 22, 24 is protected from wear by three wear tips 32, 34, 36 located at the trailing edge of the respective wall segment 20, 22, 24.

35 A distributor plate 38 is fastened to the centre of the lower disc 4. The distributor plate 38 distributes the material that is fed via the opening 8 in the upper disc 2 and protects the lower disc 4 from wear and impact damages caused by the material fed via the opening 8.

During operation of the rotor 1 a bed 40 of material is built up inside the rotor 1 against each of the three wall segments 20, 22, 24. In fig 3 only the bed 40 located adjacent to the wall segment 20 is shown. The bed 40, which consists of material that has been fed to the rotor 1 and then has been trapped inside it, extends from a rear support plate 42 to the wear tips 32, 34, 36. The bed 40 protects the wall segment 20 and the wear tips 32, 34, 36 from wear and provides a proper direction to the ejected material. The dashed arrow A describes a typical passage of a piece of rock fed to the rotor 1 via the central opening 8 and ejected via the outflow opening 26. The arrow R indicates the rotational direction of the rotor 1 during operation of the VSI-crusher.

Each wall segment 20, 22, 24 is provided with a cavity wear plate 44, 46, 48, each consisting of three cavity wear plate portions. The cavity wear plates 44, 46, 48 protects the rotor 1 and in particular the wear tips 32, 34, 36 from material rebounding from the housing wall and from ejected material and airborne fine dust spinning around the rotor 1.

In fig 4 the hexagonal shape of the distributor plate 38 is shown in greater detail. The distributor plate 38 has six equilateral, vertical side edges 50, 52, 54, 56, 58, 60. The side edge 50 is substantially parallel to the outflow direction B of the material leaving the rotor 1 via the outflow opening 26. The side edge 50 is also parallel and adjacent with the face 62 of the wear plate 14. In a similar way the side edge 58 is adjacent to the face 64 of the wear plate 16 and the side edge 54 is adjacent to the face 66 of the wear plate 18. The distributor plate 38 has a central flat area 68 from which a sloped surface 70 of the distributor plate 38 extends towards the side edges 50, 52, 54, 56, 58 and 60.

The distributor plate 38 is removably fixed to the lower disc 4 with the help of three vertical supports 72, 74, 76 fitted to the side edges 52, 56, 60 that are not



adjacent to a face of a wear plate. Thus the vertical supports 72, 74, 76 are located at some distance from the typical rock passage indicated with the arrow A.

As is shown in figure 5 the distributor plate 38 rests on a mounting plate 78. The mounting plate 78 has the same hexagonal shape as the distributor plate 38 as seen from above. The mounting plate 78 is bolted to the hub 6 and thus to the lower disc 4. A vertically mounted central bolt 80 extending through the mounting plate 78 is bolted at the centre of the hub 6. The distributor plate 38 has a central cylindrical recess 82 at its lower face 84. The diameter and depth of the recess 82 is adapted to house the circular top of the bolt 80 such that the bolt 80 centres the distributor plate 38 on the lower disc 4. The lower face 84 of the distributor plate 38 may slide on the upper surface of the mounting plate 78 when a locking member 206 according to an alternative embodiment of a vertical support described below has been removed. The lower surface 84 of the distributor plate 38 is located at a higher level than the upper surfaces of the wear plates 14, 16, 18. Thus it is possible to turn the distributor plate 38 on the mounting plate 78 without removing the wear plates 14, 16, 18.

The flat area 68 and the sloped surface 70 together form an unbroken upper surface 86 of the distributor plate 38 as indicated in fig 6. The distributor plate 38 shown in fig 6 is made entirely from white iron. Each vertical side edge 50, 52, 54, 56, 58, 60 has a mounting means in the form of a hole 88 as shown in fig 6. The hole 88 may be provided with an inner thread to receive a bolt 90 forming part of the support 72, 74 and 76 respectively, as seen in fig 7. As is shown in fig 7 the supports 72, 74, 76 are fitted in slots in the lower disc 4 and bolted to the distributor plate 38 with the help of the bolts 90 thus holding the distributor plate 38 in place.

The mounting of the distributor plate 38 is performed by lowering it such that the recess 82 engages the top of the bolt 80. The distributor plate 38 is then turned in the horizontal plane until the side edges 50, 54 and 58 have the proper position in relation to the wear plates 14, 16, 18. The supports 72, 74, 76 are mounted to the distributor plate 38 such that it becomes fixed to the lower disc 4.

After some time of operation of the rotor 1 the distributor plate 38 has been subjected to some wear. The wear pattern often has a certain relationship with the outflow openings, such that the maximum wear often occurs at the side edges 50, 54, 58 being adjacent to a horizontal wear plate. The supports 72, 74, 76 are dismantled. The distributor plate 38 is now turned horizontally, thus sliding on the upper surface of the mounting plate 78, until the side edge 52 is adjacent to the face 62 of the wear plate 14, the side edge 56 being adjacent to the face 66 of the wear plate 18 and so on. The supports 72, 74, 76 are mounted again and the rotor 1 is ready for operation. Thus it is possible to prolong the life of the distributor plate 38 by simply turning it 60° in the horizontal plane after some time of operation. At the turning sequence the distributor plate 38 need not be lifted, since it simple slides on the mounting plate 78. The turning thus becomes very quick and easy to perform.

In fig 8 another embodiment of the invention is shown. The main difference compared to the distributor plate 38 is that this embodiment is a distributor plate 138 in the form of an equilateral triangle. The distributor plate 138 has a central flat area 168 from which a sloped surface 170 extends towards the three vertical side edges 150, 152, 154. Each of the three vertical side edges 150, 152, 154 is adapted to be located adjacent to a face of a wear plate. The

distributor plate 138 is thus adapted for mounting at a rotor having three outflow openings.

In fig 9 to 12 an alternative embodiment of the  
 5 fixing of the distributor plate 38 is shown. The mounting  
 plate 78 is provided with a pair of lugs 200, 202 and a  
 round mounting hole 204 as is better shown in figure 11.  
 A vertical support in the form of a locking member 206,  
 shown in figure 12, is provided with an upper pin 208 and  
 10 a lower pin 210. The upper pin 208 fits into the hole 88,  
 which need not be threaded, of the distributor plate 38  
 and the lower pin 210 fits into the mounting hole 204 of  
 the mounting plate 78. A spring dowel pin 212 is inserted  
 via holes 214, 216 in the lugs 200, 202 to lock the  
 15 locking member 206 in its proper position. The locking  
 member 206 thus fixes the distributor plate 38 to the  
 mounting plate 78. The locking member 206 is easily  
 mounted by just inserting its pins 208, 210 into the hole  
 88 and the mounting hole 204 respectively followed by  
 20 insertion of the spring dowel pin 212 such that it locks  
 the locking member 206. The above described embodiment  
 provides for very quick mounting or turning of the  
 distributor plate 38. Preferably pairs of lugs 200, 202  
 are located at those sides of the mounting plate 78 that  
 25 are located at some distance from a rock passage, such as  
 the rock passage indicated with the arrow A in fig 3.  
 Thus the wear on the locking member 206 is minimized. As  
 indicated in fig 9 and fig 10 the upper part of the  
 locking member 206 is located below the upper surface 86  
 30 of the distributor plate 38. Thus the feed material  
 flowing over the upper surface 86 of the distributor  
 plate 38 will flow over the locking member 206 without  
 causing any substantial wear to it.

Fig 13 shows a third embodiment of the invention. A  
 35 hexagonal distributor plate 338 shown in fig 13 has  
 vertical side edges 350, 352, 354 and holes 388 that are  
 similar to the vertical side edges 50, 52, 54 and holes

88 respectively of the distributor plate 38 described above. The upper surface 386 of the distributor plate 338 is flat. The distributor plate 338 comprises a base layer 340 made from a flat sheet of a hard steel. A top layer 342 of a hard metal, such as tungsten carbide, has been coated on the flat upper surface of the base layer 340. The distributor plate 338 having the top layer 342 made of tungsten carbide has very good resistance to wear and impact and will have a very long life. The flat upper surface of the base layer 340 makes the tungsten carbide layer 342 easy to apply to the base layer 340. The fact that the upper surface 386 of the tungsten layer 342 will be flat as well also contributes to making the application of the tungsten layer 342 simple. The distributor plate 338 has a recess (not shown in fig 13) which is similar to the recess 82 of the distributor plate 38. The fact that no bolts or holes extend through the upper surface 386 avoids the formation of any weak spots in the tungsten layer 342 thus further improving its resistance to wear and impact.

It will be appreciated that numerous modifications of the embodiments described above are possible within the scope of the appended claims.

The number of edges and thus the polygonal shape of the distributor plate may be varied to fit the rotor in question. For a rotor with three outflow openings a distributor with triangular or hexagonal shape is preferably used. A nonagonal shape is also possible. For a rotor with four outflow openings a distributor having square or octagonal shape is preferably used. A dodecagonal shape is also possible. A distributor plate having a number of side edges being two times the number of outflow openings is preferable since the distributor may be turned once for prolonged life.

CLAIMS

1. A distributor plate adapted to be releasably  
 5 mounted on a horizontal lower disc (4) of a rotor (1) of  
 a vertical shaft impact crusher, said rotor (1) having an  
 opening (8) for the intake of material to be crushed and  
 at least one outflow opening (26) for material leaving  
 the rotor (1), c h a r a c t e r i s e d in that the  
 10 distributor plate (38; 138; 338) has at least one  
 straight side edge (50; 150; 350) as seen from above.

2. A distributor plate according to claim 1, wherein  
 the distributor plate (38; 138; 338) is a polygon.

3. A distributor plate according to claim 2, wherein  
 15 said polygon is an equilateral polygon, the number of  
 sides (50, 52, 54, 56, 58, 60) of the polygon being  
 chosen such that the number of sides is 1, 2 or 3 times  
 the number of outflow openings (26, 28, 30) of the rotor  
 (1) to which the distributor plate (38) is to be mounted.

20 4. A distributor plate according to claim 3, wherein  
 the number of sides (50, 52, 54, 56, 58, 60) is 2 times  
 the number of outflow openings (26, 28, 30) of the rotor  
 (1).

5. A distributor plate according to any one of the  
 25 preceding claims, wherein at least one straight side edge  
 (50) of the distributor plate (38) is adapted to be  
 parallel to an outflow direction (B) of material leaving  
 the rotor (1).

6. A distributor plate according to any one of the  
 30 preceding claims, wherein the distributor plate (38) at  
 the centre of its lower face (84) has a recess (82)  
 adapted to make the distributor plate (38) horizontally  
 turnable around a vertical shaft (80) mounted on the  
 lower disc (4), such that the position of the distributor  
 35 plate (38) in relation to the lower disc (4) may be  
 adjusted before mounting the distributor plate (38).

7. A distributor plate according to claim 6, wherein the recess (80) extends only through a part of the thickness of the distributor plate (38), the upper face (86) of the distributor plate (38) thus being unaffected by said recess (80).

8. A distributor plate according to any one of the preceding claims, wherein the upper face (386) of the distributor plate (338) comprises an unbroken layer (342) of a hard metal, such as tungsten carbide.

9. A distributor plate according to any one of the preceding claims, wherein the distributor plate comprises mounting means (88) located at a vertical side edge (50) of the distributor plate (38) and adapted for the mounting of a vertical support (72; 206) fixing the distributor plate (38) to the lower disc (4) of the rotor (1).

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100

## ABSTRACT

A distributor plate (38) is adapted to be releasably  
5 mounted on a horizontal lower disc of a rotor of a  
vertical shaft impact crusher. The rotor has an opening  
for the intake of material to be crushed and at least one  
outflow opening for material leaving the rotor. The  
distributor plate (38) has at least one straight side  
10 edge (50) as seen from above.

15

20


25

30


35

Elected for publication: Fig 6.

1/6

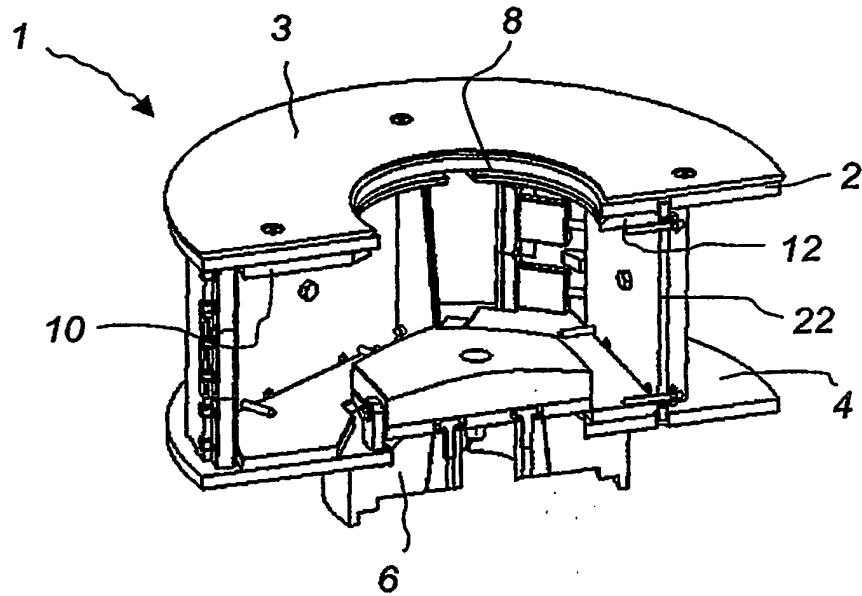


**Fig. 1**

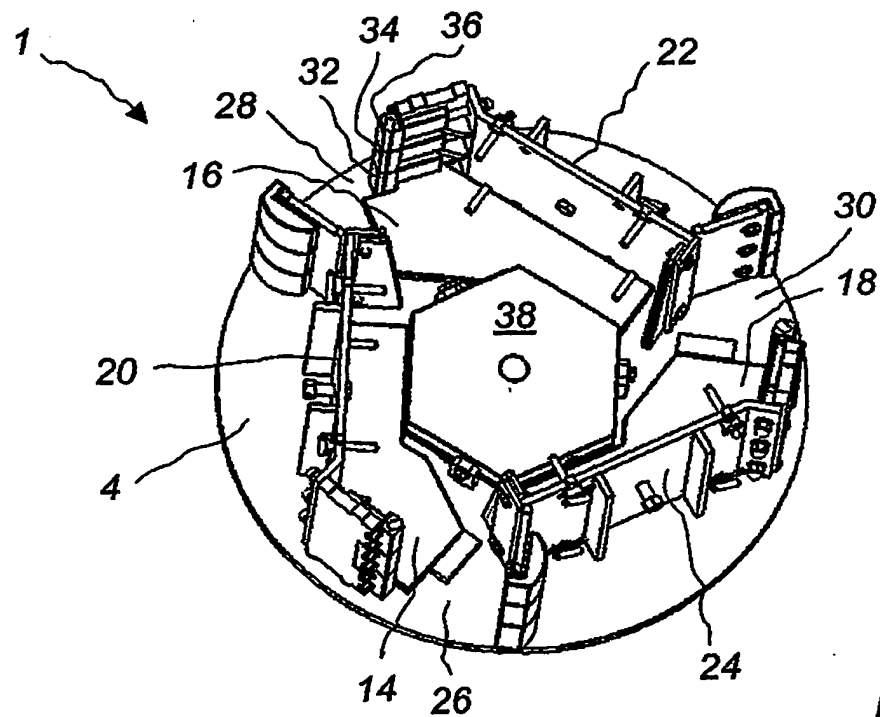


**Fig. 2**



2/6

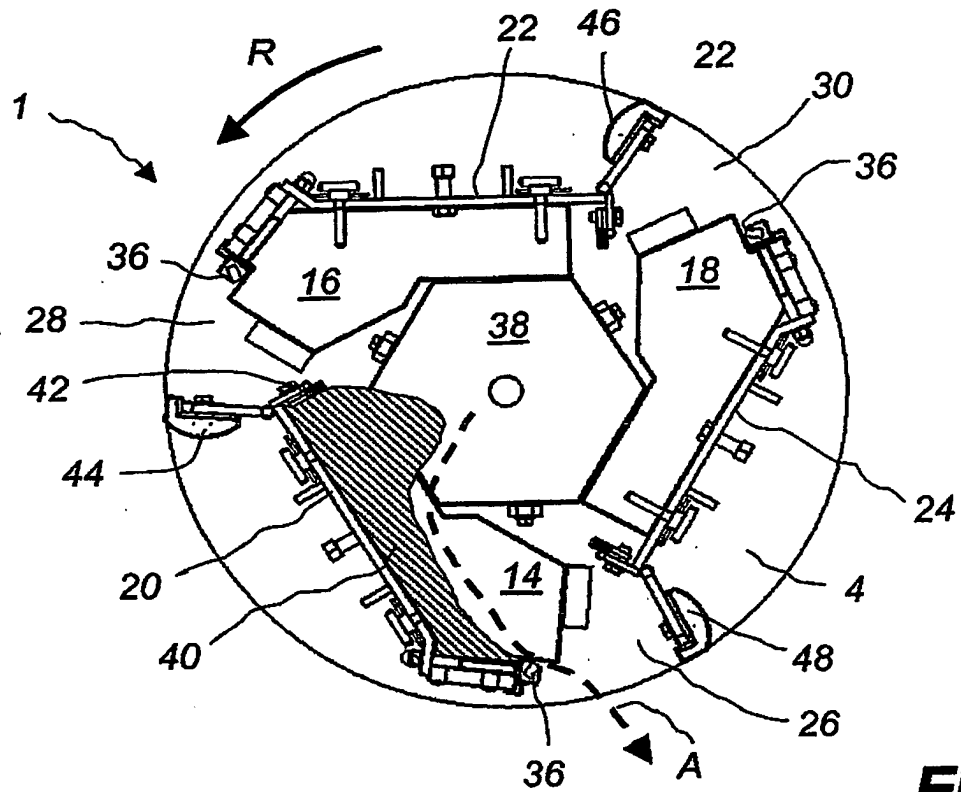


**Fig. 3**

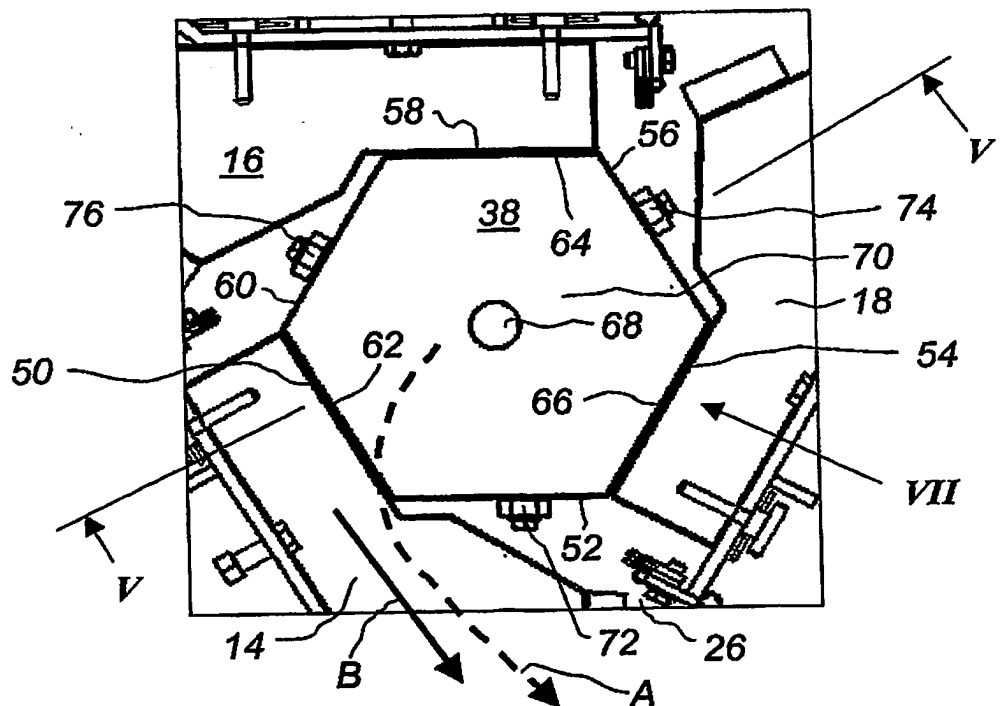


**Fig. 4**

3/6

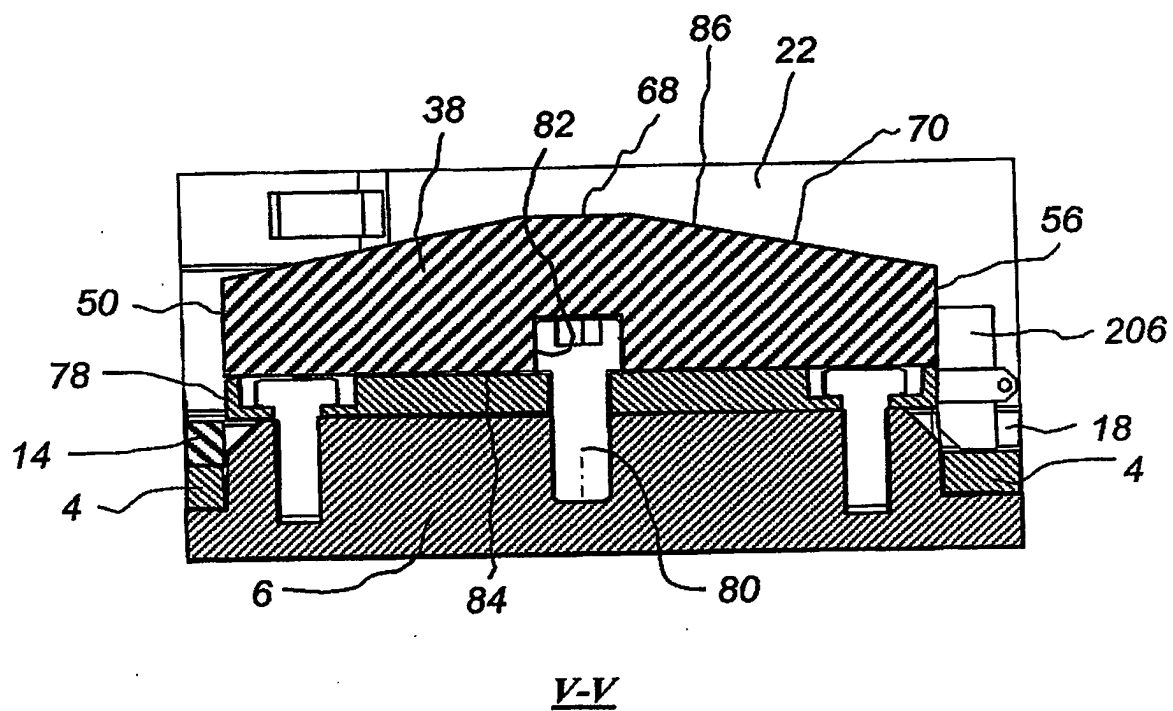


**Fig. 5**

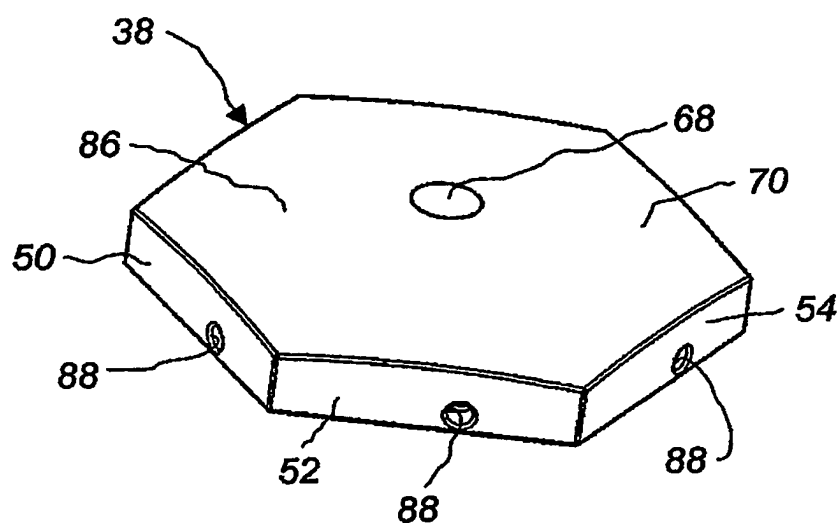


**Fig. 6**

4/6

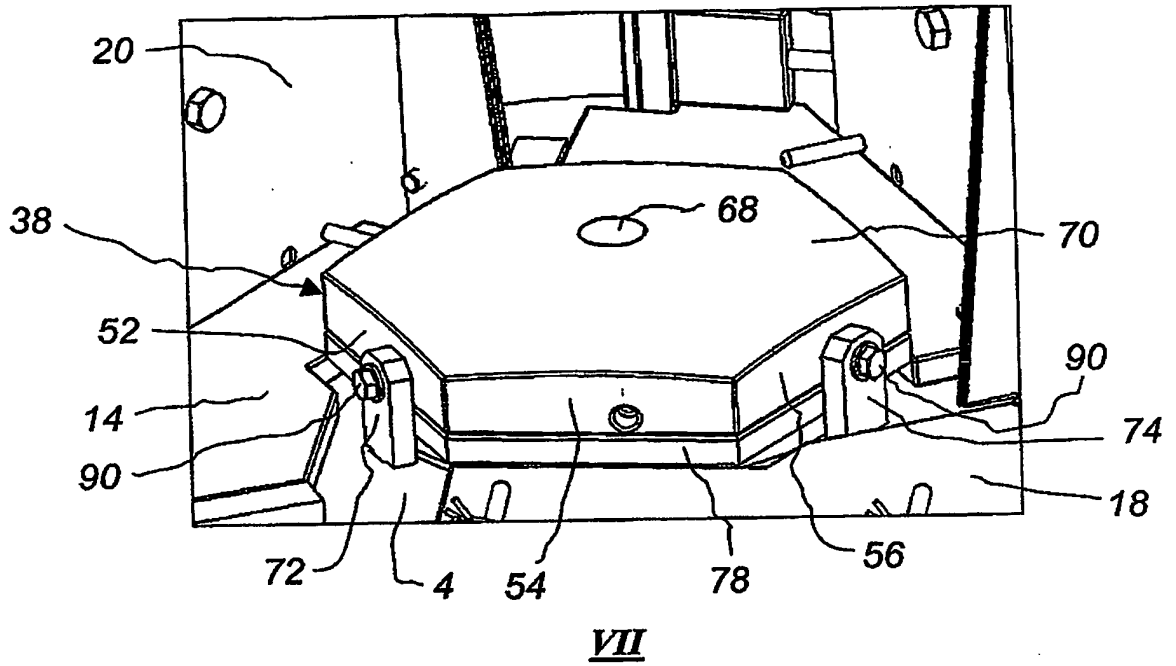


**Fig. 7**

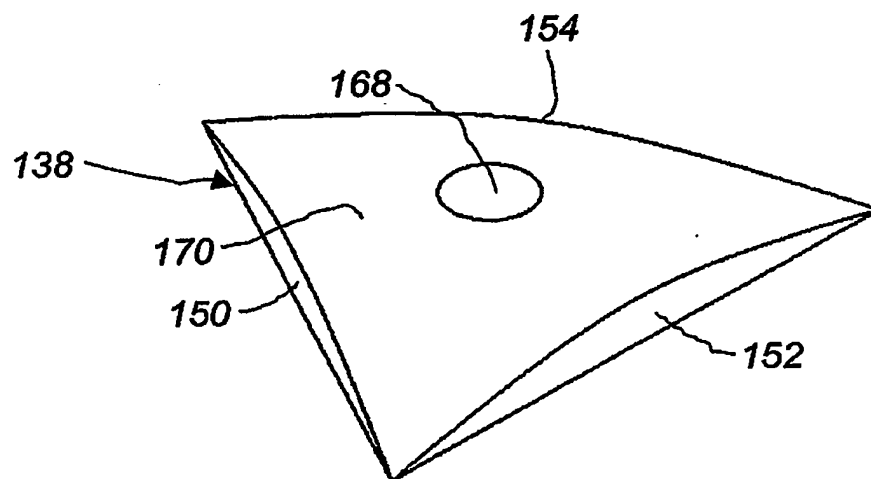


**Fig. 8**


5/6

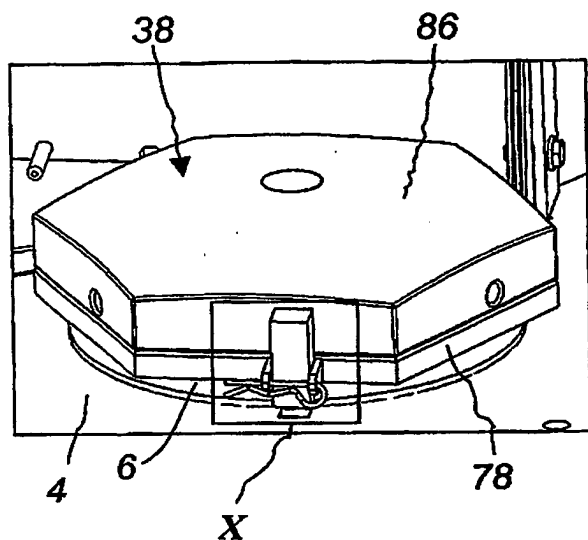


**Fig. 9**

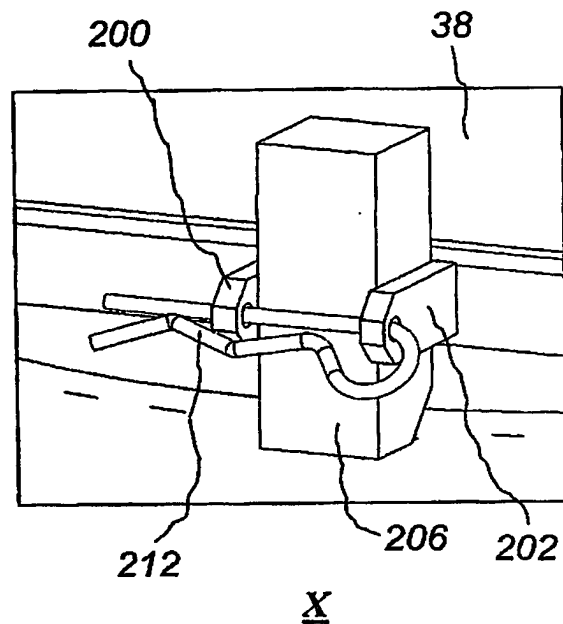

**Fig. 10**

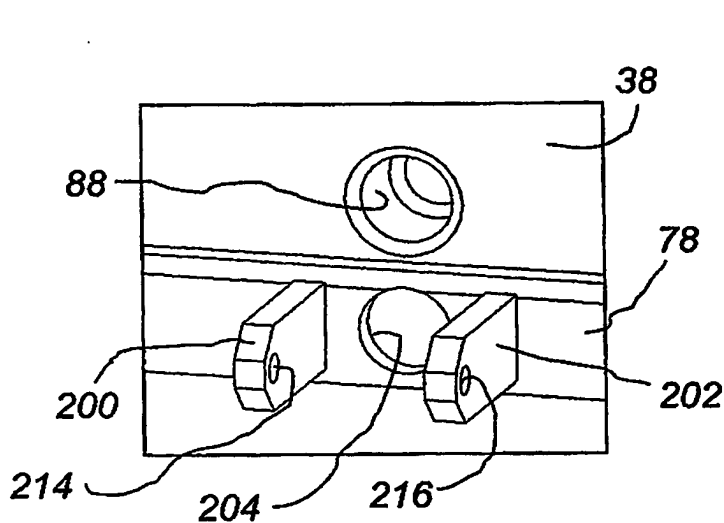

**Fig. 11**

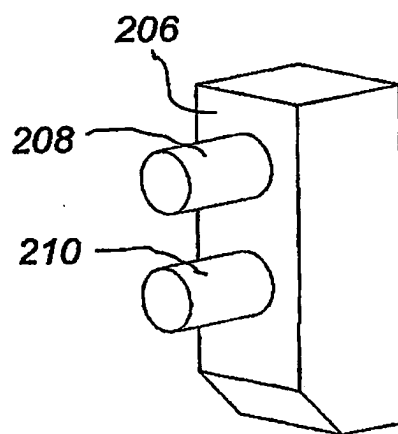

**Fig. 12**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**